1/2

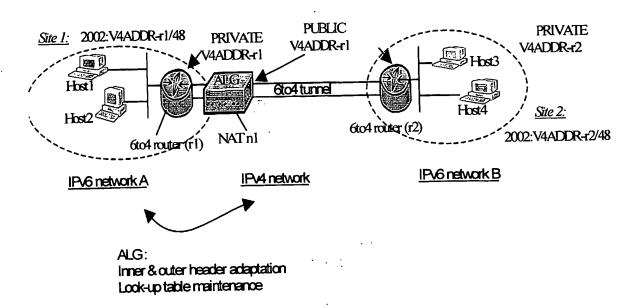


Fig. 1

FP 001	TLA ID 0x0002	V4ADDR	SLAID	Interface ID
	s) (13 bits)	(32 bits)	(16 bits)	(64 bits)
-	6to4 addre			

Fig. 2 (Prior art)

2/2

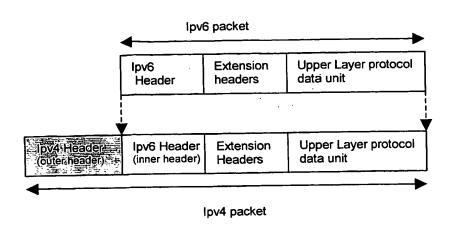


Fig. 3 (Prior art)

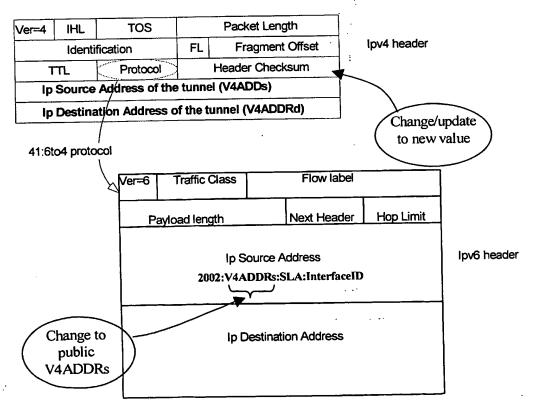


Fig. 4